


PCB 继电器	TRC3
----------------	-------------

Creepage distance:10mm;

- Transparent sealed available
- Class B/F available
- Conform to RoHS,ELV directive



ORDERING CODE 订购代码

<u>TRC3</u>	<u>D</u>	—	<u>12VDC</u>	—	<u>S</u>	—	<u>2Z</u>	<u>xx</u>
1	2		3		4		5	6
1. Relay Model 继电器型号			4. S: Sealed 密封			6. 特殊代码		
2. Coil Power 线圈功率 D=0.4W			5. 触点转换形式 2Z: Form 2C			Nil: Standard Type标准 IT: GWIT 灼热丝 750°C(at ≤2 s)		
3. Coil Nominal Voltage 线圈额定电压 5,6,9,12,18,24,48,60VDC			2H: Form 2A					
			2D: Form 2B					

COIL DATA 线圈参数 (at 20°C)

Nominal Voltage 额定电压(VDC)	5	6	9	12	18	24	48	60	0.4W
Coil Resistance 线圈阻值(Ω ±10%)	62	90	202	360	810	1440	5760	7500	
Rated Current 额定电流(mA)	80	66.7	44.6	33.3	22.2	16.7	8.3	8	
Max Operate Voltage 最大吸合电压(VDC)	3.75	4.5	6.75	9	13.5	18	36	45	
Min Release Voltage 最小释放电压(VDC)	0.5	0.6	0.9	1.2	1.8	2.4	4.8	6.0	
Max Voltage 最大电压	23°C时额定电压的130%								

CONTACT DATA 触点参数

Contact Form 触点形式	2H/2Z
Contact Material 触点材料	Silver Alloy
Load 负载	Resistive load(COS Φ=1)
Contact Ratings 触点负载	8A 250VAC
Minimum load 最小负载	100mA 5VDC
Max Switching Voltage 最大转换电压	440VAC/125VDC
Max Switching Current 最大转换电流	8A
Max Switching Power 最大转换功率	2000VA
Contact Resistance 接触电阻	100m Ω Max at 6VDC 1A
Life Expectancy 寿命	Electrical 电气寿命: 100,000 Operations(at20Operations/minute)
	Mechanical 机械寿命: 10,000,000 Operations(at300Operations/minute)





■ CHARACTERISTICS DATA 性能参数

Insulation Resistance绝缘电阻值		100M Ω Min at 500VDC
Dielectric Strength	Between Open Contacts触点间耐压	1000VAC(for one minute)
	Between Contacts and Contacts触点组间耐压	2500VAC(for one minute)
	Between Contacts and coil触点与线圈间耐压	5000VAC(for one minute)
Operate Time吸合时间		15ms
Release Time释放时间		8ms
Temperature Range环境温度		-40 $^{\circ}$ C to +85 $^{\circ}$ C
Shock Resistance冲击		Operating Extremes动作极限: 10G
		Damage Limits破坏极限: 100G
Vibration Resistance振动		10-55Hz, 1.5mm
Max. switching frequency最大转换频率		Mechanical: 18,000operations/hr
		Electrical: 1,200operations/hr
Humidity湿度		40-85%
Weight重量		Approx 14g
Safety Standard安全标准		UL cUL TUV CQC


■ APPROVED STANDARDS 安全标准

Model(型号)	Coiling rating (线圈电压)	Safety Standard (安全标准)	Contact rating (触点负载)
TRC3	5 to 60VDC	UL/cUL	8A 250VAC
		CQC	8A 250VAC
		TUV	8A 250VAC


■ ENGINEERING DATA 设计参数

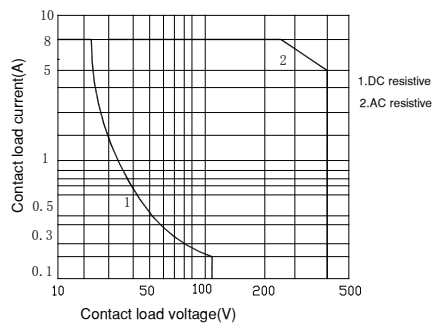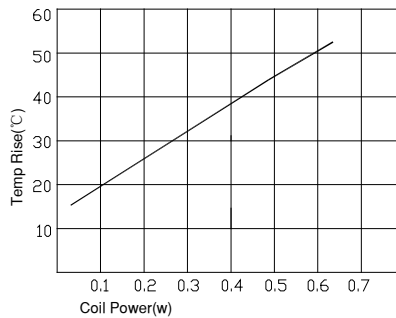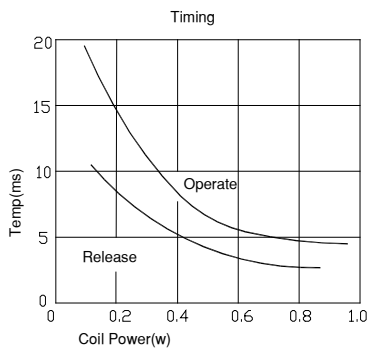



OVERALL AND MOUNTING DIMENSIONS 安装图

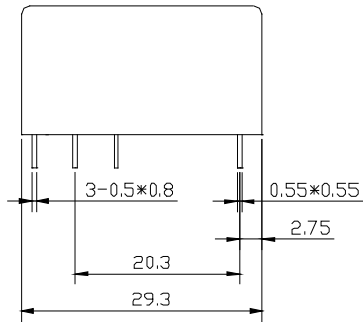


安装图

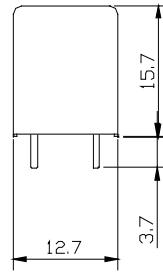


接线图

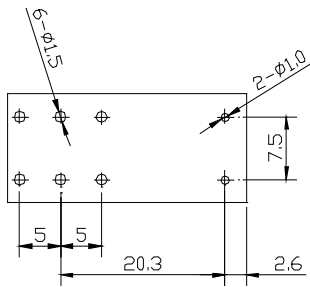

2Z Form 2C



2H Form 2A



2D Form 2B

REMARK (备注):

- 1、产品部分外形尺寸中未注尺寸公差：当外形尺寸 $\leq 1\text{mm}$ 时，公差为 $\pm 0.2\text{mm}$ ；当外形尺寸在 $1\sim 5\text{mm}$ 时，公差为 $\pm 0.3\text{mm}$ ；当外形尺寸 $> 5\text{mm}$ 时，公差为 $\pm 0.4\text{mm}$ 。
- 2、安装孔尺寸中未注尺寸公差均为 $\pm 0.1\text{mm}$ 。

声明:

本产品规格书仅供客户使用时参考，如有更改，恕不另行通知。